



Get More from Your Process



Manual Screen Changer (MSC)

Manual Screen Changers (MSC) are an ideal solution for minimizing labor and downtime for screen changes during routine line shutdown. The compact design eliminates the need for line disassembly and uses a hand lever or optional ratchet to manually index the slide plate for screen change. The heart of the Manual Screen Changer is a pressure-activated sealing system. During screen change when the line is at rest, the slide plate coasts between the relaxed seals. Once the new screen is indexed online and the line is restarted, the seal system activates to press the seals tightly against the slide plate for reliable leak-free performance. Manual screen changer model sizes accommodate rates to 2,450+ lbs/hr (930+ Kg/h) and can accommodate extruder screw pull-through for feed screws up to 5.5" (139 mm) diameter.

PSI Manual Screen Changers can be custom designed for specific applications and processes including higher pressures, integrated divert, and special materials.


Features

- Pressure activated sealing system
- 3-position, removable swing handle
- Compact design
- Extruder screw pull-through
- Bolt-on or bolt-through extruder connection
- Low restriction breaker plate

Manual Screen Changer (MSC)

Options

- Ratchet gear-drive slide plate shift
- Pneumatic cylinder slide plate shift
- High temperature, patented all-steel pressure seal
- Integral adaptors
- Integral material divert position
- Application-specific materials of construction
- High delta-P breaker plates
- Larger breaker plate holes for lower pressure drop
- Super plates for improved screen utilization
- Special heater voltage

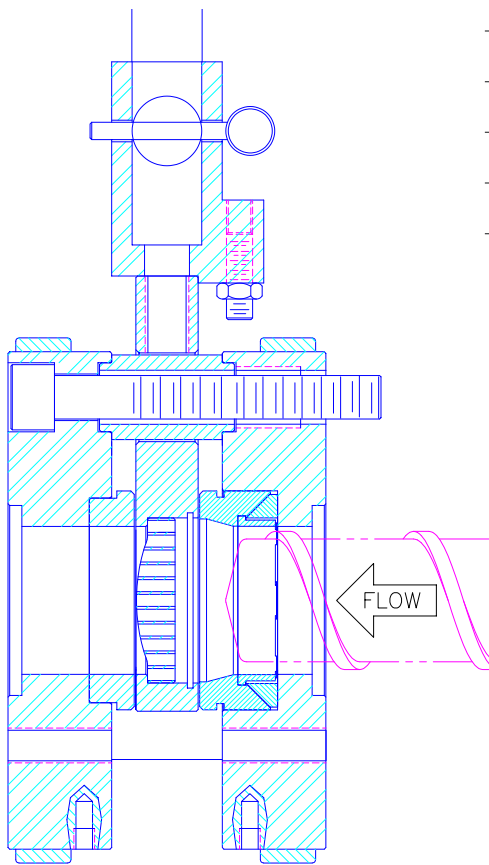


Technical

Specifications	Standard
Temperature °F [°C]	Up to 650 [343]
Max oper. pressure PSI [bar]	max. 10,000 [670]
Control zones (housing)	One (1)
Heating	Electric/Fluid

Model	Max. Throughput*		Max. Clearance Bore Diam.		Screen Diameter		Screen Area		Body Heater	Weight	
	lb/h	kg/h	inch	mm	inch	mm	in2	cm2	kW	lb	kg
MSC-046	250	114	1.58	40.14	1.83	46.3	2.7	16.9	1.1	40	19
MSC-058	380	173	2.03	51.57	2.30	58.3	4.2	26.7	1.0	60	28
MSC-076	650	295	2.68	68.08	3.01	76.3	7.2	45.8	1.5	85	39
MSC-096	1,050	477	3.55	90.17	3.80	96.3	11.4	72.9	2.6	150	69
MSC-116	1,500	681	4.21	106.94	4.58	116.3	16.5	106.3	4.0	210	96
MSC-125	1,750	794	4.80	121.92	4.94	125.3	19.2	123.4	4.0	225	103
MSC-148	2,450	1112	5.49	139.45	5.84	148.3	26.8	172.8	4.8	322	147

* Throughput rates are estimates and are subject to material, viscosity, pressure, and filtration level.

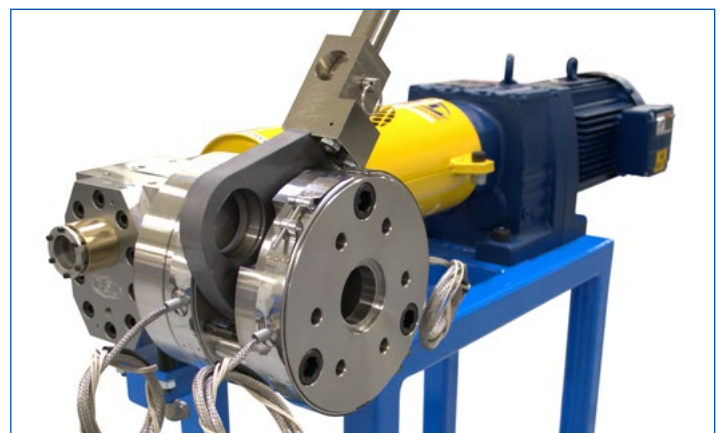

Shown: MSC-058
Manual Screen
Changer with
EGP-45 Gear Pump.



Main Office:
PSI-Polymer Systems, Inc.
1703 Pineview Street SE
Conover, NC 28613
United States

Contact Us:
www.psi-polymersystems.com
sales@psi-polymersystems.com
service@psi-polymersystems.com
Ph: USA 1.828.468.2600

European Sales Office:
PSI-Polymer Systems Europe, GmbH
Egerten 3
DE 74388 Talheim, Germany
HTS code: 8477900020

